


TOP MOUNTED CROSS ARM			
CATALOG #	FIXTURE QTY.	EPA (SQ. FT.)	WEIGHT (LBS.)
CRT-18	18	15.0	604

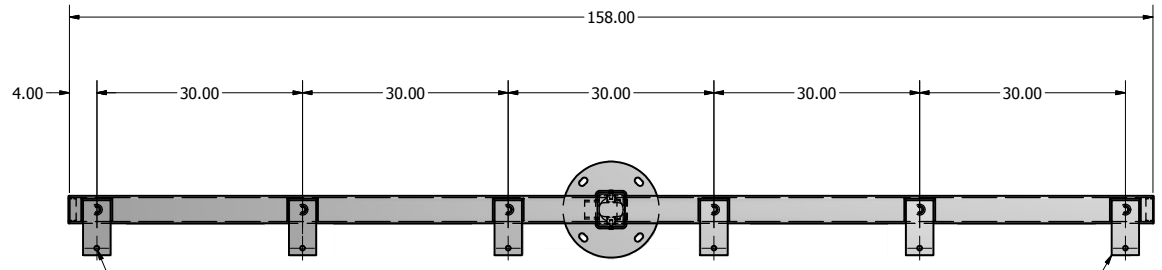

DRILLED PER FIXTURE REQUIREMENTS

.38 X 4.00 X 8.00 FIXTURE MOUNTING PLATE

.25 X 4.00 X 5.00 RECTANGULAR TUBE

REMOVABLE CAP


.25 X 2.00 X 4.00 RECTANGULAR TUBE

3.00 X 5.00 HAND HOLE W/ COVER

1/2 NPT WELDED COUPLING

2 IN NPT WELDED COUPLING

Ø14.00 X .50 THK MOUNTING PLATE

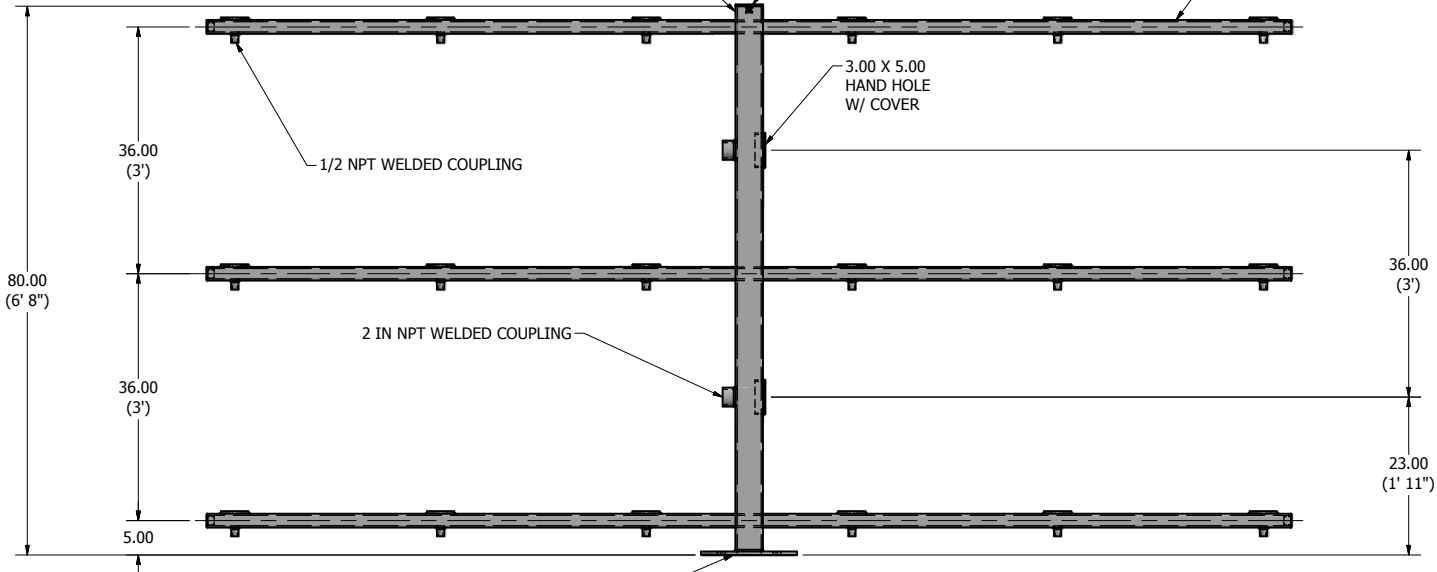

FINISH: TOP MOUNTED CROSS ARM BRACKET TO BE FINISHED TO MATCH POLE.

lyte poles
 a DWM company
 P.O. Box 340
 Eastpointe, MI 48021
 P: (586) 771-4610 | F: (586) 771-5527
 www.lytepoles.com

DRAWN: M. HARVALA	2/16/2015
CHECKED	
REVISION:	DATE:
APPROVED:	
QUOTE:	
S.O.#	
REF:	SCALE: NONE

SOME GEOGRAPHICAL AREAS HAVE SPECIAL WIND CONDITIONS THAT CAN CREATE WIND INDUCED VIBRATIONS CAUSING A FATIGUE PROBLEM. NO METHOD HAS YET BEEN FOUND FOR PREDICTING DESTRUCTIVE LIGHTING POLE VIBRATION. THESE CONDITIONS ARE UNIQUE AND CANNOT BE GUARANTEED AGAINST, AND ARE THE RESPONSIBILITY OF A LOCAL SITE ENGINEER.		
TITLE:		
CATALOG:		
DWG NO: CRT-18	SIZE C	SHEET 1 OF 1

